


STRAIGHT ROUND STEEL POLES

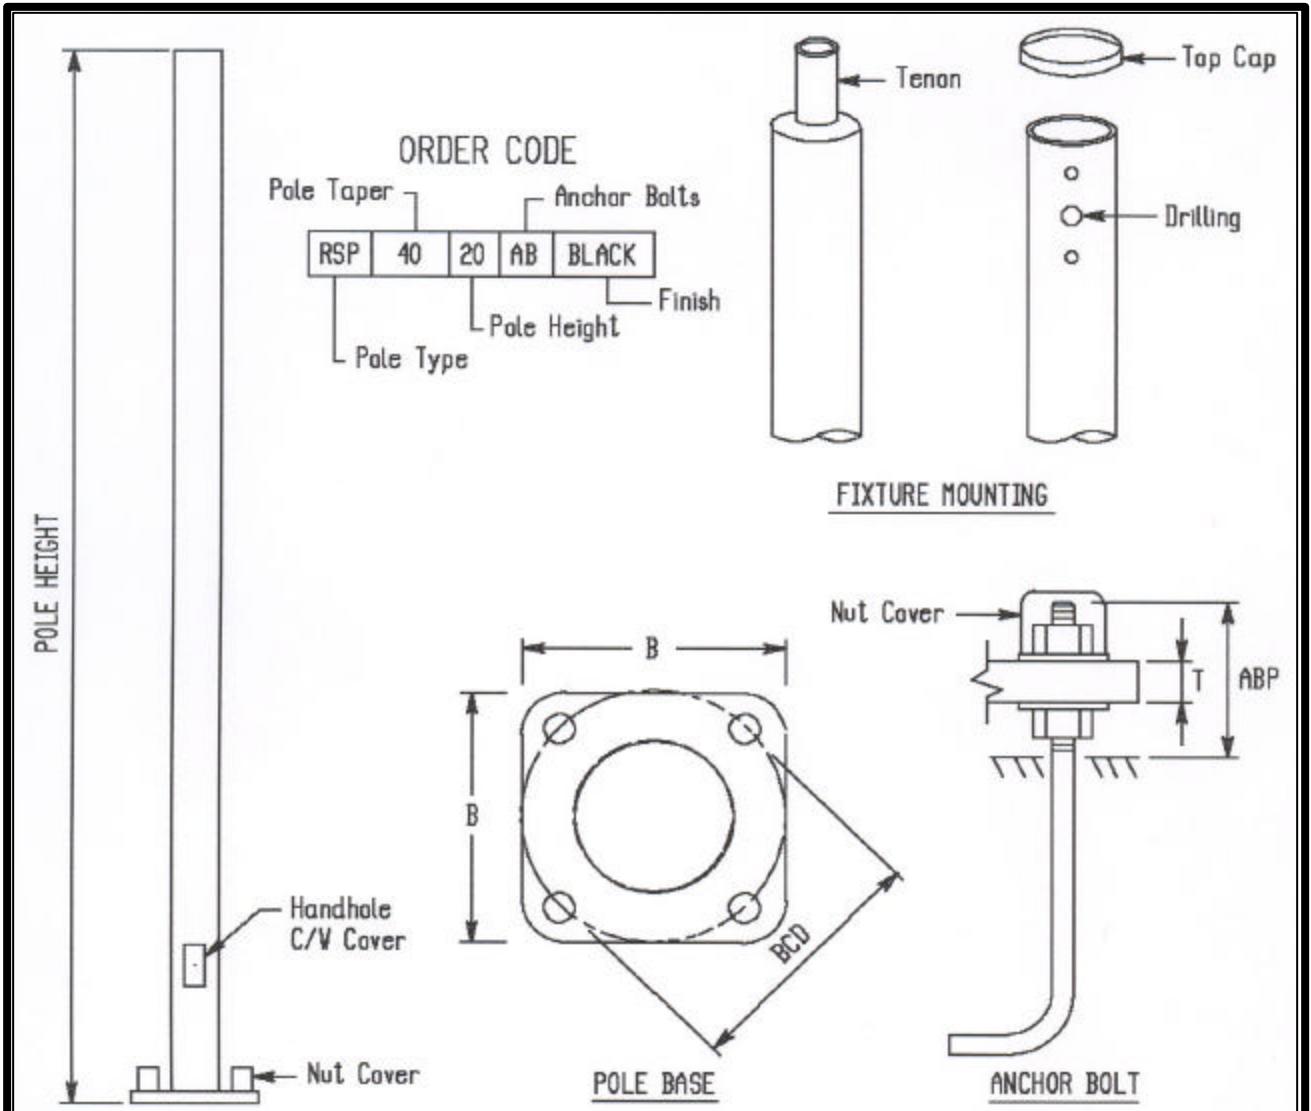

| Pole Height | Cat. No. | Weight | Anchor Bolts | BCD | ABP | Max. EPA* |
|-------------|-----------|----------|--------------|-----|--------|-----------|
| 8'- 0" | RSP-3008 | 40 lbs. | 5/8" X 18" | 7" | 2 1/2" | 6 sq.ft. |
| 10'- 0" | RSP-3010 | 52 lbs. | 5/8" X 18" | 7" | 2 1/2" | 6 sq.ft. |
| 10'- 0" | RSP-4010 | 70 lbs. | 3/4" X 24" | 8" | 3" | 10 sq.ft. |
| 12'- 0" | RSP-4012 | 85 lbs. | 3/4" X 24" | 8" | 3" | 10 sq.ft. |
| 15'- 0" | RSP-4015 | 105 lbs. | 3/4" X 24" | 8" | 3" | 10 sq.ft. |
| 20'- 0" | RSP-4020 | 128 lbs. | 3/4" X 24" | 8" | 3" | 6 sq.ft. |
| 24'- 0" | RSP-4024H | 202 lbs. | 7/8" X 24" | 10" | 3" | 4 sq.ft. |
| 20'- 0" | RSP-5020 | 222 lbs. | 7/8" X 24" | 10" | 3" | 8 sq.ft. |
| 24'- 0" | RSP-5024 | 261 lbs. | 1" X 34" | 10" | 4" | 6 sq.ft. |
| 30'- 0" | RSP-5030 | 320 lbs. | 1" X 34" | 10" | 4" | 6 sq.ft. |

All steel shall be to CSA G40.21 with a 50 ksi yield.
 All welding in accordance with CSA W59 & W47.1.
 Designed to AASHTO with 80 mph wind speed & 1.3 gust factor.
 Designed for EPA listed, effective projected area.(epa)
 File# RSP-CAT1 September /2003

1. Pole to be used for luminaire support only.
Maximum luminaire arm 2 feet. (Max. total eccentricity 3ft.)
2. Maximum 150 lbs supported weight.
3. Pole designed for base mounting only.
4. Anchors are engineered for pole size.(footing design by others)

SPINA'S STEEL WORKERS CO. LTD.

229 Wilkinson Road, Brampton, ON L6T 4M2 Tel: (905) 453-2211 Fax: (905) 453-8334

www.spinasteel.com